

# DEWALT®

## ANCHORS & FASTENERS

### HEX NUT SIDE

Enables installation with a wrench

### CINCH NUT MECHANISM

Designed to eliminate thread misalignment

### THREADED ROD COMPATIBILITY

Accepts burred or oiled rods and commonly available standard UNC threaded rods

### DOUBLE SIDED

Separate thread-in and push-in sides designed for attaching existing anchor points to pre-fabrication assemblies

# PUSH-IN COUPLER

**GUARANTEED TOUGH.®**

**PFM3613038  
PFM3613012**

# PUSH-IN COUPLER

## SIZING OPTIONS


CAT#	SIZE	AVAILABLE LOAD* (TENSION)	QTY-BOX
PFM3613038	3/8 in. Single Thread	4,125 lbs	20
PFM3613012	1/2 in. Single Thread	6,000 lbs	20

\* Allowable load capacities are calculated using an applied safety factor of 3.0.

## INSTALLATION OPTIONS


### HEX NUT SIDE UP / PUSH-IN SIDE DOWN

THREAD COUPLERS ONTO HANGING ROD. PUSH PRE-FABRICATION ASSEMBLY INTO COUPLERS.

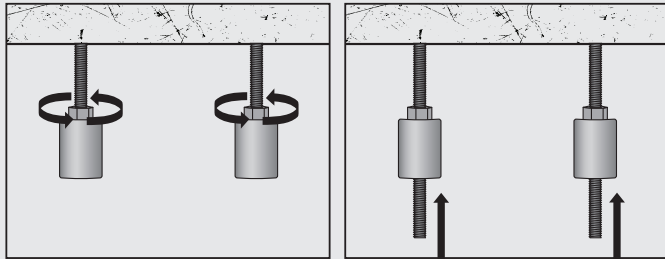

### PUSH-IN SIDE UP / HEX NUT SIDE DOWN

THREAD COUPLERS ONTO PRE-FABRICATION ASSEMBLY. PUSH COUPLERS W/ ASSEMBLY ATTACHED INTO HANGING ROD.

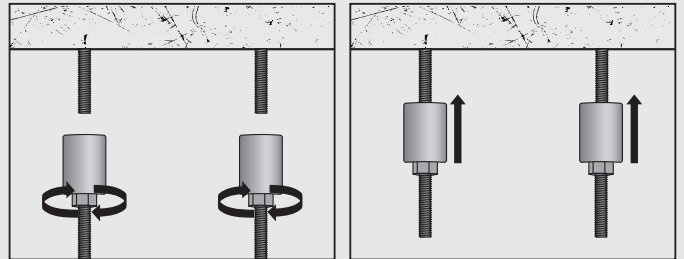

## ANCHOR COMPATIBILITY

COUPLERS COMPATIBLE WITH 3/8" AND 1/2" THREADED DECK INSERTS AND ANCHORS (E.G. DDI+ AND HANGERMATE+)



ROD DIA.	DDI+ PART#	HANGERMATE+ PART#	PUSH-IN COUPLER PART#
3/8"	PFM2511100	PFM1421000	PFM3613038
1/2"	PFM2511110	PFM1421050	PFM3613012