

**GENERAL INFORMATION**

**TAPPER™**

Concrete Screw Anchor

Type 410 & 304 Stainless Steel

**PRODUCT DESCRIPTION**

The Tapper fastening system is a family of screw anchors for light to medium duty applications in concrete, masonry block and brick base materials. The Tapper is fast and easy to install and provides a neat, finished appearance. The Tapper screw anchor is engineered with matched tolerance drill bits and installation tools designed to meet the needs of the user and also provide optimum performance.

For every project, it is important to consider several things before making a selection: The proper head style, the color or finish that is desired, and the required level of corrosion resistance. The Tapper screw anchor is available in 410 and 304 stainless steels. Head styles include a hex head and Phillips flat head.

**GENERAL APPLICATIONS AND USES**

**410 Stainless Steel Tappers**

- Screen Enclosures
- Storm Shutters
- Light Duty Fixture
- Light Duty Industrial Applications

**304 Stainless Steel Tappers**

- Exterior Applications
- Food and Beverage Facilities
- Marine Applications
- Waste and Water Treatment Plants

**FEATURES AND BENEFITS**

- + Tested in accordance with ASTM E488 and AC106 criteria
- + Available in several head styles
- + High-low thread design
- + Does not exert expansion forces
- + No hole spotting required
- + Available in 410 and 304 stainless steel

**APPROVALS AND LISTINGS**


- Miami Dade County Notice of Acceptance (NOA) 14-0915.04

**GUIDE SPECIFICATIONS**

CSI Divisions: 03 16 00 - Concrete Anchors, 04 05 19.16 - Masonry Anchors and 05 05 19 - Post-Installed Concrete Anchors. Concrete Screw Anchors shall be Tapper as supplied by Powers Fasteners, Inc., Brewster, NY.

**SECTION CONTENTS**

General Information..... 1  
 Installation Specifications..... 2  
 Material Specifications..... 2  
 Performance Data..... 3  
 Design Criteria..... 5  
 Ordering Information..... 6



410 STAINLESS STEEL TAPPER



304 STAINLESS STEEL TAPPER

**ANCHOR MATERIALS**

- Type 410 Stainless Steel
- Type 304 Stainless Steel

**ANCHOR SIZE RANGE (TYP.)**

- 3/16" diameter x 1-1/4" to 2-3/4" length
- 1/4" diameter x 1-1/4" to 6" length

**SUITABLE BASE MATERIALS**

- Normal-Weight Concrete
- Lightweight Concrete
- Hollow Concrete Masonry (CMU)
- Solid Brick Masonry

**INSTALLATION SPECIFICATIONS**


**304 Stainless Steel Tapper**

| Dimension                              | Anchor Diameter, d |          |
|--|--------------------|----------|
|  | 1/4" HEX           | 1/4" PFH |
| Tapper Drill Bit Size, $d_{bit}$ (in.) | 3/16               | 3/16     |
| Fixture Clearance Hole, $d_h$ (in.)    | 5/16               | 5/16     |
| Thread Size (UNC)                      | 1/4-14             | 1/4-14   |
| Head Height (in.)                      | 9/64               | 3/16     |
| Head Width (in.)                       | 5/16               | 1/2 O.D. |
| Washer O.D., $d_w$ (in.)               | 13/32              | N/A      |
| Washer Thickness, (in.)                | 1/32               | N/A      |
| Hex Driver (in.) / Phillips Driver     | 3/8                | #3       |


**410 Stainless Steel Tapper**

| Dimension                              | Anchor Diameter, d |          |
|--|--------------------|----------|
|  | 1/4" HEX           | 1/4" PFH |
| Tapper Drill Bit Size, $d_{bit}$ (in.) | 3/16               | 3/16     |
| Fixture Clearance Hole, $d_h$ (in.)    | 5/16               | 5/16     |
| Thread Size (UNC)                      | 1/4-14             | 1/4-14   |
| Head Height (in.)                      | 9/64               | 3/16     |
| Head Width (in.)                       | 5/16               | 1/2 O.D. |
| Washer O.D., $d_w$ (in.)               | 13/32              | N/A      |
| Washer Thickness, (in.)                | 1/32               | N/A      |
| Hex Driver (in.) / Phillips Driver     | 3/8                | #3       |


**Installation Procedure**




Using the proper diameter bit, drill a hole into the base material to a depth of at least 1/4" deeper than the embedment required. The Tapper drill bit must be used.



Blow the hole clean of dust and other material.



Select the Tapper installation tool and drive socket to be used. Insert the head of the Tapper into the hex head socket or Phillips head driver. Set the drill motor to the "rotation only" mode.



Place the point of the Tapper through the fixture into the pre-drilled hole and drive the anchor in one steady continuous motion until it is fully seated at the proper embedment. The driver will automatically disengage from the head of the Tapper.

**MATERIAL SPECIFICATIONS**

| Anchor Component       | 304 Stainless Steel      | 410 Stainless Steel  |
|------------------------|--------------------------|--|
| Anchor Body            | Type 304 Stainless Steel | Type 410 Stainless Steel   |
| Coating/Plating/Finish | Passivated               | Class 4 Sealcoat (1500 hour rating for ASTM B 117 salt test, 20 hours rating for DIN 50018.2.05 kesterick-test undamaged coating reference). |

Note: Type 410 Stainless Steel fasteners in contact with aluminum and aluminum alloys is not recommended in accordance with AISI SS 502/SSINA guidelines.

**PERFORMANCE DATA**

**Ultimate Load Capacities for Stainless Steel Tapper Screw Anchor in Normal-Weight Concrete<sup>1,2</sup>**

| Nominal Anchor Diameter<br>d<br>in.<br>(mm) | Anchor Material                | Minimum Embedment Depth<br>h <sub>v</sub><br>in.<br>(mm) | Minimum Concrete Compressive Strength |                       |                            |                       |                            |                       |                            |                       |
|---|--------------------------------|--|---------------------------------------|-----------------------|----------------------------|-----------------------|----------------------------|-----------------------|----------------------------|-----------------------|
|   |                                |  | f'c = 2,000 psi (13.8 MPa)            |                       | f'c = 3,000 psi (20.7 MPa) |                       | f'c = 4,000 psi (27.6 MPa) |                       | f'c = 6,000 psi (41.4 MPa) |                       |
|   |                                |  | Tension<br>lbs.<br>(kN)               | Shear<br>lbs.<br>(kN) | Tension<br>lbs.<br>(kN)    | Shear<br>lbs.<br>(kN) | Tension<br>lbs.<br>(kN)    | Shear<br>lbs.<br>(kN) | Tension<br>lbs.<br>(kN)    | Shear<br>lbs.<br>(kN) |
| 1/4<br>(6.4)                                | Type 304<br>Stainless<br>Steel | 1<br>(25.4)  | 500<br>(2.3)                          | 1,180<br>(5.3)        | 600<br>(2.7)               | 1,180<br>(5.3)        | 700<br>(3.2)               | 1,180<br>(5.3)        | 700<br>(3.2)               | 1,180<br>(5.3)        |
|   |                                | 1-1/4<br>(31.8)  | 855<br>(3.8)                          | 1,265<br>(5.7)        | 855<br>(3.8)               | 1,265<br>(5.6)        | 1,015<br>(4.6)             | 1,340<br>(6.0)        | 1,320<br>(5.9)             | 1,340<br>(6.0)        |
|   |                                | 1-1/2<br>(38.1)  | 1,140<br>(5.1)                        | 1,340<br>(6.0)        | 1,220<br>(5.6)             | 1,340<br>(6.0)        | 1,340<br>(6.0)             | 1,320<br>(5.9)        | 1,580<br>(7.1)             | 1,340<br>(6.0)        |
|   |                                | 1-3/4<br>(44.5)  | 1,140<br>(5.1)                        | 1,640<br>(7.4)        | 1,520<br>(6.8)             | 1,640<br>(7.4)        | 1,580<br>(7.1)             | 1,640<br>(7.4)        | 1,580<br>(7.1)             | 1,640<br>(7.4)        |
| 3/16<br>(4.7)                               | Type 410<br>Stainless<br>Steel | 7/8<br>(22.2)  | -                                     | -                     | 220<br>(1.0)               | 865<br>(3.8)          | 250<br>(1.1)               | 1,000<br>(4.4)        | -                          | -                     |
|   |                                | 1-1/4<br>(31.8)  | -                                     | -                     | 465<br>(2.0)               | 1,115<br>(5.0)        | 540<br>(2.9)               | 1,285<br>(5.7)        | -                          | -                     |
| 1/4<br>(6.4)                                |                                | 1-1/2<br>(38.1)  | -                                     | -                     | 2,160<br>(9.6)             | 2,420<br>(10.8)       | 2,160<br>(9.6)             | 2,420<br>(10.8)       | -                          | -                     |
|   |                                | 1-3/4<br>(44.5)  | -                                     | -                     | 2,430<br>(10.8)            | 2,420<br>(10.8)       | 2,430<br>(10.8)            | 2,420<br>(10.8)       | -                          | -                     |

1. Tabulated load values are for anchors installed in concrete. Concrete compressive strength must be at the specified minimum at the time of installation.
2. Ultimate load capacities must be reduced by a minimum safety factor of 4.0 or greater to determine allowable working load. Consideration of safety factors of 10 or higher may be necessary depending upon the application such as life safety or overhead.

**Allowable Load Capacities for Stainless Steel Tapper Screw Anchor in Normal-Weight Concrete<sup>1,2</sup>**

| Nominal Anchor Diameter<br>d<br>in.<br>(mm) | Anchor Material                | Minimum Embedment Depth<br>h <sub>v</sub><br>in.<br>(mm) | Minimum Concrete Compressive Strength |                       |                            |                       |                            |                       |                            |                       |
|---|--------------------------------|--|---------------------------------------|-----------------------|----------------------------|-----------------------|----------------------------|-----------------------|----------------------------|-----------------------|
|   |                                |  | f'c = 2,000 psi (13.8 MPa)            |                       | f'c = 3,000 psi (20.7 MPa) |                       | f'c = 4,000 psi (27.6 MPa) |                       | f'c = 6,000 psi (41.4 MPa) |                       |
|   |                                |  | Tension<br>lbs.<br>(kN)               | Shear<br>lbs.<br>(kN) | Tension<br>lbs.<br>(kN)    | Shear<br>lbs.<br>(kN) | Tension<br>lbs.<br>(kN)    | Shear<br>lbs.<br>(kN) | Tension<br>lbs.<br>(kN)    | Shear<br>lbs.<br>(kN) |
| 1/4<br>(6.4)                                | Type 304<br>Stainless<br>Steel | 1<br>(25.4)  | 125<br>(0.6)                          | 295<br>(1.3)          | 150<br>(0.7)               | 295<br>(1.3)          | 175<br>(0.8)               | 295<br>(1.3)          | 175<br>(0.8)               | 295<br>(1.3)          |
|   |                                | 1-1/4<br>(31.8)  | 215<br>(1.0)                          | 315<br>(1.4)          | 215<br>(1.0)               | 315<br>(1.4)          | 255<br>(1.1)               | 335<br>(1.5)          | 305<br>(1.4)               | 335<br>(1.5)          |
|   |                                | 1-1/2<br>(38.1)  | 285<br>(1.3)                          | 335<br>(1.5)          | 305<br>(1.4)               | 335<br>(1.5)          | 330<br>(1.5)               | 335<br>(1.5)          | 330<br>(1.5)               | 335<br>(1.5)          |
|   |                                | 1-3/4<br>(44.5)  | 360<br>(1.6)                          | 410<br>(1.8)          | 380<br>(1.7)               | 410<br>(1.8)          | 395<br>(1.8)               | 410<br>(1.8)          | 395<br>(1.8)               | 410<br>(1.8)          |
| 3/16<br>(4.7)                               | Type 410<br>Stainless<br>Steel | 7/8<br>(22.2)  | -                                     | -                     | 55<br>(0.25)               | 215<br>(0.9)          | 64<br>(0.3)                | 250<br>(1.1)          | -                          | -                     |
|   |                                | 1-1/4<br>(31.8)  | -                                     | -                     | 115<br>(0.5)               | 280<br>(1.3)          | 135<br>(0.6)               | 320<br>(1.4)          | -                          | -                     |
| 1/4<br>(6.4)                                |                                | 1-1/2<br>(38.1)  | -                                     | -                     | 540<br>(2.4)               | 605<br>(2.7)          | 540<br>(2.4)               | 605<br>(2.7)          | -                          | -                     |
|   |                                | 1-3/4<br>(44.5)  | -                                     | -                     | 608<br>(2.7)               | 605<br>(2.7)          | 608<br>(2.7)               | 605<br>(2.7)          | -                          | -                     |

1. Allowable load capacities listed are calculated using and applied safety factor of 4.0. Consideration of safety factors of 10 or higher may be necessary depending on the application, such as life safety or overhead.
2. Critical and minimum spacing and edge distances as well as reduction factors for intermediate spacing and edge distances are listed in Design Criteria section.

**MECHANICAL ANCHORS**

**TAPPER™**  
Concrete Screw Anchor


### Ultimate and Allowable Load Capacities for Tapper Screw Anchor in Lightweight Concrete<sup>1,2,3</sup>

| Nominal Anchor Diameter d in. (mm) | Anchor Material          | Minimum Embedment Depth h <sub>v</sub> in. (mm) | Tension, lbs (kN)  |                |                      |                |                      |                | Shear, lbs (kN)                        |                |
|------------------------------------|--------------------------|---|--|----------------|----------------------|----------------|----------------------|----------------|--|----------------|
|                                    |                          |   | Minimum Concrete Compressive Strength (f' <sub>c</sub> ) |                |                      |                |                      |                | f' <sub>c</sub> ≥ 3,000 psi (20.7 MPa) |                |
|                                    |                          |   | 3,000 psi (20.7 MPa)                                     |                | 4,000 psi (27.6 MPa) |                | 5,000 psi (34.5 MPa) |                |  |                |
|                                    |                          |   | Ultimate Load  | Allowable Load | Ultimate Load        | Allowable Load | Ultimate Load        | Allowable Load | Ultimate Load                          | Allowable Load |
| 1/4 (6.4)                          | Type 304 Stainless Steel | 1-1/2 (38.1)                                    | 270 (1.2)  | 70 (0.3)       | 300 (1.4)            | 75 (0.3)       | 325 (1.5)            | 80 (0.4)       | 520 (2.3)                              | 130 (0.6)      |

1. Tabulated load values are for anchors installed in structural sand-lightweight concrete. Concrete compressive strength must be at the specified minimum at the time of installation.
2. Allowable load capacities listed are calculated using and applied safety factor of 4.0. Consideration of safety factors of 10 or higher may be necessary depending upon the application such as life safety or overhead.
3. Linear interpolation may be used to determine allowable loads for intermediate compressive strengths.

### Allowable Load Capacities for Tapper Screw Anchor in Hollow Block<sup>1,2,3,4,5</sup>


| Nominal Anchor Diameter d in. (mm) | Anchor Material                       | Minimum Embedment Depth h <sub>v</sub> in. (mm) | Lightweight, Medium & Normal Weight CMU |                 |
|------------------------------------|---------------------------------------|---|---|-----------------|
|                                    |                                       |   | f' <sub>c</sub> ≥ 3,000 psi (13.8 MPa)  |                 |
|                                    |                                       |   | Tension lbs. (kN)                       | Shear lbs. (kN) |
| 1/4 (6.4)                          | Type 410 Stainless Steel              | 1 (25.4)  | 140 (0.6)                               | 210 (0.9)       |
|                                    | Type 304 and Type 410 Stainless Steel | 1-1/4 (31.8)                                    | 120 (0.5)                               | 205 (0.9)       |
|                                    |                                       | 1-1/2 (38.1)                                    | 145 (0.7)                               | 245 (1.1)       |
|                                    |                                       | 1-3/4 (44.5)                                    | 145 (0.7)                               | 245 (1.1)       |

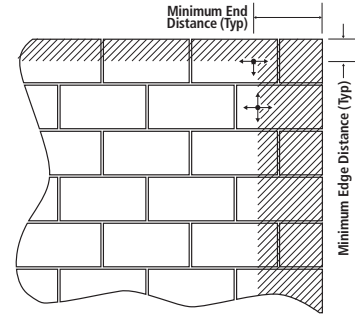

1. Tabulated load values are for anchors installed in minimum 6-inch wide, minimum Grade N, Type II, lightweight, medium-weight or normal-weight concrete masonry units conforming to ASTM C 90. Mortar must be minimum Type N. Masonry compressive strength must be at the specified minimum at the time of installation (f'<sub>m</sub> ≥ 2,000 psi).
2. Allowable load capacities listed are calculated using an applied safety factor of 5.0.
3. The tabulated values are applicable for screw anchors installed at a critical spacing between screw anchors of 16 times the screw anchor diameter. The screw anchors may be reduced to a minimum spacing distance of 8 times the screw diameter provided the allowable loads are reduced by 70 percent. Linear interpolation for allowable loads may be used for intermediate spacing distances.
4. The tabulated values are applicable for screw anchors installed at a minimum edge distance of 12 times the screw anchor diameter unless otherwise noted.
5. The tabulated values are applicable for installations into the face shell of the masonry member. The face shell thickness must be able to accommodate the specified embedment depth. Masonry cells may be grouted.

### Allowable Load Capacities for Tapper Screw Anchor in Brick Masonry<sup>1,2,3,4,5</sup>

| Nominal Anchor Diameter d in. (mm) | Anchor Material                       | Minimum Embedment Depth h <sub>v</sub> in. (mm) | Brick Masonry                         |                 |
|------------------------------------|---------------------------------------|---|---------------------------------------|-----------------|
|                                    |                                       |   | f' <sub>c</sub> ≥ 1,300 psi (9.0 MPa) |                 |
|                                    |                                       |   | Tension lbs. (kN)                     | Shear lbs. (kN) |
| 1/4 (6.4)                          | Type 410 Stainless Steel              | 1 (25.4)  | 145 (0.6)                             | 288 (1.3)       |
|                                    | Type 304 and Type 410 Stainless Steel | 1-1/4 (31.8)                                    | 160 (0.7)                             | 330 (1.5)       |
|                                    |                                       | 1-1/2 (38.1)                                    | 190 (0.9)                             | 345 (1.6)       |
|                                    |                                       | 1-3/4 (44.5)                                    | 190 (0.9)                             | 345 (1.6)       |

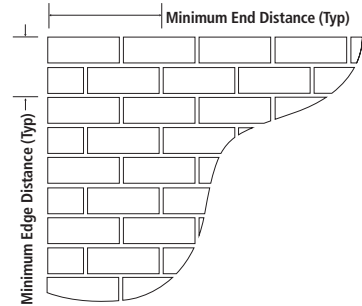

1. Tabulated load values are for anchors installed in multiple wythe, minimum Grade SW, solid clay brick masonry walls conforming to ASTM C 62. Mortar must be minimum Type N. Masonry compressive strength must be at the specified minimum at the time of installation (f'<sub>m</sub> ≥ 1,300 psi).
2. Allowable load capacities are calculated using an applied safety factor of 5.0.
3. Linear interpolation may be used to determine allowable load capacities for intermediate embedments.
4. The tabulated values are for anchors installed at a minimum edge and end distance of 4 inches.
5. The tabulated values are for anchors installed at a minimum of 12 anchor diameters on center for 100 percent capacity. Spacing distances may be reduced to 6 anchor diameters on center provided the capacities are reduced by 50 percent. Linear interpolation may be used for intermediate spacing distances.

**DESIGN CRITERIA**

**Combined Loading**

For anchors loaded in both shear and tension, the combination of loads should be proportioned as follows:

$$\left(\frac{N_u}{N_n}\right) + \left(\frac{V_u}{V_n}\right) \leq 1$$

Where:  $N_u$  = Applied Service Tension Load  
 $N_n$  = Allowable Tension Load  
 $V_u$  = Applied Service Shear Load  
 $V_n$  = Allowable Shear Load

**LOAD ADJUSTMENT FACTORS FOR SPACING AND EDGE DISTANCES IN NORMAL WEIGHT CONCRETE<sup>1</sup>**

**Anchor Installed in Normal-Weight Concrete**

| Anchor Dimension  | Load Type         | Critical Distance (Full Anchor Capacity) | Critical Load Factor    | Minimum Distance (Reduced Capacity) | Minimum Load Factor      |
|-------------------|-------------------|--|-------------------------|-------------------------------------|--------------------------|
| Spacing (s)       | Tension and Shear | $s_{cr} = 12d$                           | $F_{NS} = F_{VS} = 1.0$ | $s_{min} = 6d$                      | $F_{NS} = F_{VS} = 0.50$ |
| Edge Distance (c) | Tension and Shear | $c_{cr} = 12d$                           | $F_{NC} = F_{VC} = 1.0$ | $c_{min} = 6d$                      | $F_{NC} = F_{VC} = 0.50$ |


1. Load values, found in the Performance Data Tables, are multiplied by the reduction factors when spacing edge distances are less than critical distances. Linear interpolation is allowed for spacing and edge distances that fall between critical and minimum distances. When a group of anchors is affected by both reduced spacing and edge distance, the spacing and edge distance reduction factors must be combined (multiplied).

**Spacing Reduction Factors -Tension ( $F_{NS}$ ) & Shear ( $F_{VS}$ )**

| Spacing, Tension ( $F_{NS}$ ) & Shear ( $F_{VS}$ ) |       |       |       |
|--|-------|-------|-------|
| Diameter (in)                                      |       | 3/16  | 1/4   |
| $s_{cr}$ (in)                                      |       | 2-1/4 | 3     |
| $s_{min}$ (in)                                     |       | 1-1/8 | 1-1/2 |
| Spacing, s (in.)                                   | 1-1/8 | 0.50  | -     |
|  | 1-1/2 | 0.67  | 0.50  |
|  | 2     | 0.89  | 0.67  |
|  | 2-1/4 | 1.00  | 0.75  |
|  | 2-1/2 | -     | 0.83  |
|  | 3     | -     | 1.00  |
|  | 3-1/2 | -     | -     |
|  | 4     | -     | -     |
| 4-1/2  | -     | -     |       |

Notes: For anchors loaded in tension and shear, the critical edge distance ( $s_{cr}$ ) is equal to 12 anchor diameters (12d) at which the anchor achieves 100% of load.

Minimum edge distance ( $s_{min}$ ) is equal to 6 anchor diameters (6d) at which the anchor achieves 50% of load.

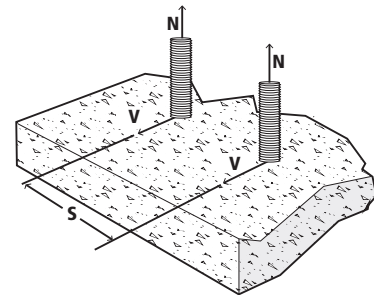


**Edge Distance Reduction Factors -Tension ( $F_{NC}$ ) & Shear ( $F_{VC}$ )**

| Spacing, Tension ( $F_{NC}$ ) & Shear ( $F_{VC}$ ) |       |       |       |
|--|-------|-------|-------|
| Diameter (in)                                      |       | 3/16  | 1/4   |
| $c_{cr}$ (in)                                      |       | 2-1/4 | 3     |
| $c_{min}$ (in)                                     |       | 1-1/8 | 1-1/2 |
| Edge Distance, c (in.)                             | 1-1/8 | 0.50  | -     |
|  | 1-1/2 | 0.67  | 0.50  |
|  | 2     | 0.89  | 0.67  |
|  | 2-1/4 | 1.00  | 0.75  |
|  | 2-1/2 | -     | 0.83  |
|  | 3     | -     | 1.00  |
|  | 3-1/2 | -     | -     |
|  | 4     | -     | -     |
| 4-1/2  | -     | -     |       |

Notes: For anchors loaded in tension and shear, the critical edge distance ( $c_{cr}$ ) is equal to 12 anchor diameters (12d) at which the anchor achieves 100% of load.

Minimum edge distance ( $c_{min}$ ) is equal to 6 anchor diameters (6d) at which the anchor achieves 50% of load.

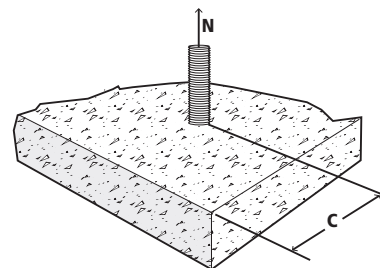

**ORDERING INFORMATION**

Hex head Tapper anchors are measured from below the washer while flat head Tapper anchors are measured end to end. To select the proper minimum anchor length, determine the embedment depth required to obtain the desired load capacity. Then add the thickness of the fixture, including any spacers or shims, to the embedment depth.


**Do not select a length that will result in an embedment into the base material which is greater than 1-3/4" to 2".**

**Most concrete screw anchors cannot be properly driven to a depth of more than 2", especially in denser base materials.**

**Type 304 Stainless Steel Tapper, Hex Head & Flat Head**

| Catalog Number |      | Size          | Standard Box | Standard Carton | Wt./100 | Drill Bit Reference |         |
|----------------|------|---------------|--------------|-----------------|---------|---------------------|---------|
| HEX            | PFH  |               |              |                 |         | Straight            | SDS HEX |
| 2880           | 2887 | 1/4" x 1-1/4" | 100          | 500             | 1-1/2   | 2894                | 2790    |
| 2881           | 2888 | 1/4" x 1-3/4" | 100          | 500             | 1-3/4   | 2894                | 2790    |
| 2882           | 2889 | 1/4" x 2-1/4" | 100          | 500             | 2       | 2895                | 2790    |
| 2883           | 2890 | 1/4" x 2-3/4" | 100          | 500             | 2-3/4   | 2895                | 2790    |


One drill bit is packaged in each box of Tappers.

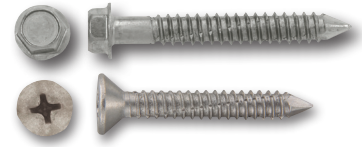

**Type 410 Stainless Steel Tapper, Hex Head & Flat Head**

| Catalog Number |      | Size           | Standard Box | Standard Carton | Wt./100 | Drill Bit Reference |      |
|----------------|------|----------------|--------------|-----------------|---------|---------------------|------|
| HEX            | PFH  |                |              |                 |         | SDS HEX             |      |
| 4180           | 4185 | 3/16" x 1-1/4" | 100          | 500             | 1-1/2   |                     | 2793 |
| 4181           | 4186 | 3/16" x 1-3/4" | 100          | 500             | 1-3/4   |                     | 2793 |
| 4182           | 4187 | 3/16" x 2-1/4" | 100          | 500             | 2       |                     | 2793 |
| 4183           | 4188 | 3/16" x 2-3/4" | 100          | 500             | 2-3/4   |                     | 2793 |
| 4110           | 4118 | 1/4" x 1-1/4"  | 100          | 500             | 2-3/4   |                     | 2796 |
| 4112           | 4120 | 1/4" x 1-3/4"  | 100          | 500             | 2-3/4   |                     | 2796 |
| 4114           | 4123 | 1/4" x 2-1/4"  | 100          | 500             | 2-3/4   |                     | 2796 |
| 4116           | 4124 | 1/4" x 2-3/4"  | 100          | 500             | 2-3/4   |                     | 2796 |
| 4117           | 4125 | 1/4" x 3-1/4"  | 100          | 500             | 2-3/4   |                     | 2796 |
| 4119           | -    | 1/4" x 3-3/4"  | 100          | 500             | 2-3/4   |                     | 2796 |
| 4127           | -    | 1/4" x 4"      | 100          | 500             | 2-3/4   |                     | 2797 |
| 4128           | -    | 1/4" x 5"      | 100          | 500             | 2-3/4   |                     | 2797 |
| 4129           | -    | 1/4" x 6"      | 100          | 500             | 2-3/4   |                     | 2797 |

One drill bit is packaged in each box of Tappers.

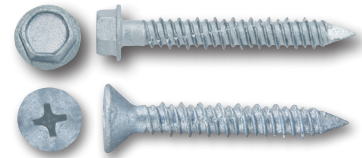

**Tapper Carbide Drill Bits for 410 Stainless Steel (Do not use with Type 304 Stainless Steel)**

**Hex Shank SDS-Plus**

| Catalog Number | Nominal Tapper Drill Bit Size | Drill Bit Range | Usable Length | Standard Tube | Wt./10 |
|----------------|-------------------------------|-----------------|---------------|---------------|--------|
| 2793           | 5/32" x 5"                    | 0.168" - 0.175" | 3"            | 1             | 1      |
| 2794           | 5/32" x 7"                    |                 | 5"            | 1             | 1      |
| 2796           | 3/16" x 5"                    | 0.202" - 0.204" | 3"            | 1             | 1      |
| 2797           | 3/16" x 7"                    |                 | 5"            | 1             | 1      |



**Tapper Carbide Drill Bits for Type 304 Stainless Steel**

**Straight Shank**

| Catalog Number | Nominal Tapper Drill Bit Size | Drill Bit Range | Usable Length | Standard Tube | Wt./10 |
|----------------|-------------------------------|-----------------|---------------|---------------|--------|
| 2894           | 3/16" x 3-1/2"                | 0.215" - 0.216" | 2"            | 10            | 1/4    |
| 2895           | 3/16" x 4-1/2"                |                 | 3"            | 10            | 1/4    |



**Hex Shank SDS-Plus**

| Catalog Number | Nominal Tapper Drill Bit Size | Drill Bit Range | Usable Length | Standard Tube | Wt./10 |
|----------------|-------------------------------|-----------------|---------------|---------------|--------|
| 2790           | 3/16" x 5"                    | 0.215" - 0.216" | 3"            | 1             | 1      |

**Installation Tools**

| Catalog Number | Description             | Max Screw Length | Max. Bit Length | Standard Tube | Wt./Each |
|----------------|-------------------------|------------------|-----------------|---------------|----------|
| 2791           | Tapper 1000 Tool Kit    | 4"               | 5-1/2"          | 1             | 3/4      |
| 2792           | CondriDrive® 2000       | 2-3/4"           | 4-1/2"          | 1             | 2/3      |
| 2795           | 1000 SDS Extension (8") | 6"               | 7-1/2"          | 1             | 1/2      |

