

**GENERAL INFORMATION**

**LEGS®**

Wallboard Anchor

**PRODUCT DESCRIPTION**

The Legs anchor is a one piece drive type anchor designed for use in hollow gypsum wallboard for light to medium duty loads. It is made from heat treated carbon steel which is zinc coated using a special plating process and can be used with No. 6 or No. 8 screws. The Legs anchor is a fast, easy to use expansion anchor designed for use in wallboard. As the screw enters the anchor, it engages the pre-formed tabs in each leg causing them to expand outwards into the base material. Removal of the anchor, if required, is easy. Once removed, the anchor leaves a small slit in the wallboard versus the gaping holes left with other types of hollow wall anchors.


**FEATURES AND BENEFITS**

- + Fast and easy to use
- + Leaves small "slit" in wallboard, versus larger holes left with other wall anchors
- + Removable


**MATERIAL AND INSTALL SPECIFICATIONS**

Anchor Component	Component Material
Anchor Body	Heat Treated Spring Steel

**INSTALLATION GUIDELINES**

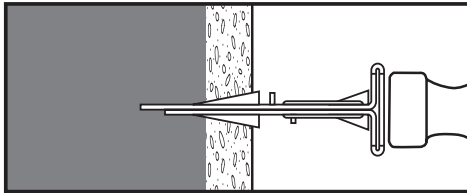

Place the tip of the anchor against the face of the wallboard and tap in with a hammer or back of a screwdriver until the flange is seated against the wallboard.

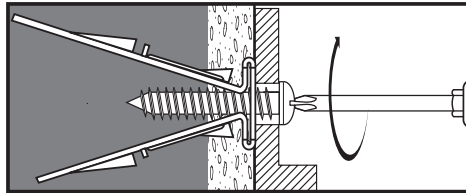

Locate the fixture and insert a No. 6 or No. 8 metal screw through the fixture hole into the installed anchor. Tighten the screw until the fixture is securely seated against the base material and the anchor is fully expanded.

**PERFORMANCE DATA**

**Ultimate and Allowable Load Capacities for Legs in Wallboard<sup>1,2</sup>**

Loads	3/8" Wallboard		1/2" Wallboard		5/8" Wallboard		3/4" Wallboard	
	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
Ultimate Loads	60 (0.3)	85 (0.4)	70 (0.3)	115 (0.5)	95 (0.4)	165 (0.7)	100 (0.5)	170 (0.8)
Allowable Loads	15 (0.1)	20 (0.1)	20 (0.1)	30 (0.1)	25 (0.1)	40 (0.2)	25 (0.1)	45 (0.2)

1. Allowable load capacities listed are calculated using an applied safety factor of 4.0.  
2. These fasteners are not recommended for use overhead or applications where holding values are critical.

**ORDERING INFORMATION**

**Legs Drywall Anchor**


Cat. No.	Description	Standard Box	Standard Carton
2336	Legs Wallboard Anchor	100	1,000
2335	Legs Anchor, No. 8 x 1" Screw	100	1,000

**Bulk Legs**

Cat. No.	Description	Standard Box	Standard Carton
2338	Legs Wallboard Anchor	-	5,000

**SECTION CONTENTS**

General Information..... 1  
 Installation Guidelines..... 1  
 Performance Data..... 1  
 Ordering Information..... 1



LEGS

**ANCHOR MATERIALS**

- Zinc plated carbon steel

**ANCHOR SIZE RANGE (TYP.)**

- No. 6 screw or No. 8 screws

**SUITABLE BASE MATERIALS**

- Wallboard

